Revolution | Delta Plastics

Farm	Ward Corbin
Field	140 west
Layout	Jun 2023
Watered Area	68 ac
Furrow Count	468
Hole Spacing	38" -- Alternating Furrows
Uniformity	91 %
Min Head Pressure	0.76 ft
Max Head Pressure	3.23 ft
Flow Per Furrow	3.42 gpm
Watering Time	37.4 hrs for 3 in
Flow Rate	1600 gpm
Pipe Length	3124 ft

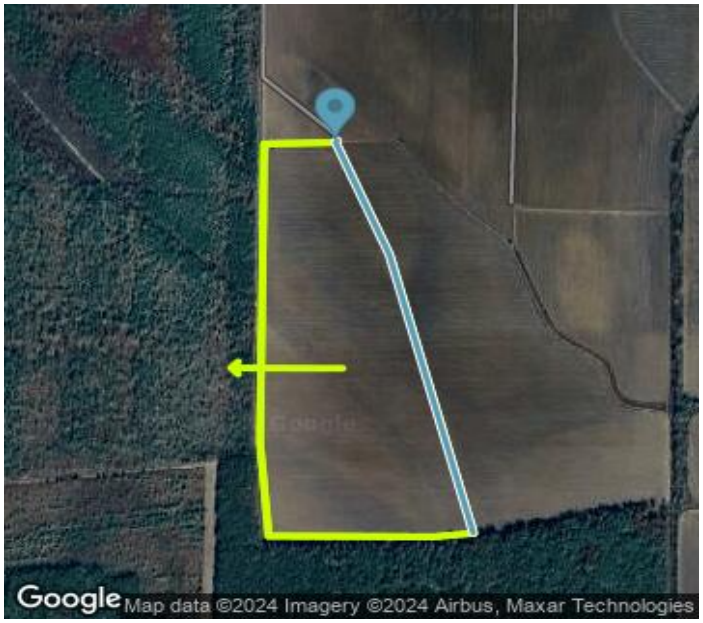

Pipe Size	Function	Length (ft)	Hole Size	Furrow Count
15x10	Supply	0 - 14		
15x10	Irrigation	14 - 118	1/4"	15
15x10	Irrigation	118 - 525	5/16"	59
15x10	Irrigation	525 - 911	3/8"	56
15x10	Irrigation	911 - 1339	7/16"	65
15x10	Irrigation	1339 - 1766	1/2"	65
15x10	Irrigation	1766 - 2232	9/16"	71
15x10	Irrigation	2232 - 3131	5/8"	137

Start	Stop	Duration (hrs)	Water (gal)	Moisture Method	Measurement
Total		0	0		0